

# Debearder Pro



1440 SOUTH ADAMS STREET, BLUFFTON IN 46714 (260) 824-3400, (800) 248-8318, FAX 260-824-5463  
[clipperseparation@atferrell.com](mailto:clipperseparation@atferrell.com) [www.atferrell.com](http://www.atferrell.com)

The Clipper Debearder Pro is a multi-purpose machine available with various motor sizes and styles to handle a wide variety of jobs. The Clipper Debearder originally designed to debarde barley has become one of the most versatile machines in the entire Clipper line. The Debearder Pro series incorporates improvements such as seven gauge drum material thickness, increased hammer hardness depth, and a new style machined stress proof drive shaft. For more information about this and other Clipper products, please call your nearest Clipper Representative or call our Factory Direct, toll free (800) 248-8318.

## Applications

- Debeard barley to improve test weight
- Break up alfalfa pods, grass clusters, flax balls, crested wheat, fescues, brome, and cassia bark
- De-awn bronco grass (in oats), dill seed, celery seed
- Polish tomato seed, and coffee beans.
- Clip oats to remove excess fibers, increase test weight, enhance appearance and cleaning ability
- Remove mold from pepper balls
- Hull "whitecaps" in wheat
- Break up Spelt Clumps

## Options


- Various Motor Drive Packages of 50 or 60 Hertz, Single or Three Phase, TEFC or Ex-Proof
- Electronic variable speed




## Features

- 1 Heavy duty seven gauge steel housing
- 2 New style machined stress proof drive shaft
- 3 Interchangeable heat treated hammers with increased hardness depth
- 4 Two bottom cleanout doors for ease of cleanout along with one top inspection door
- 5 Various size motors and voltages with a HTD sheave and belt drive
- 6 Variable speed option available
- 7 New style heavy duty base with forklift lift slots
- 8 Discharge gate with two adjustable weights (not Shown)

## Capacities

Up to 500 BPH

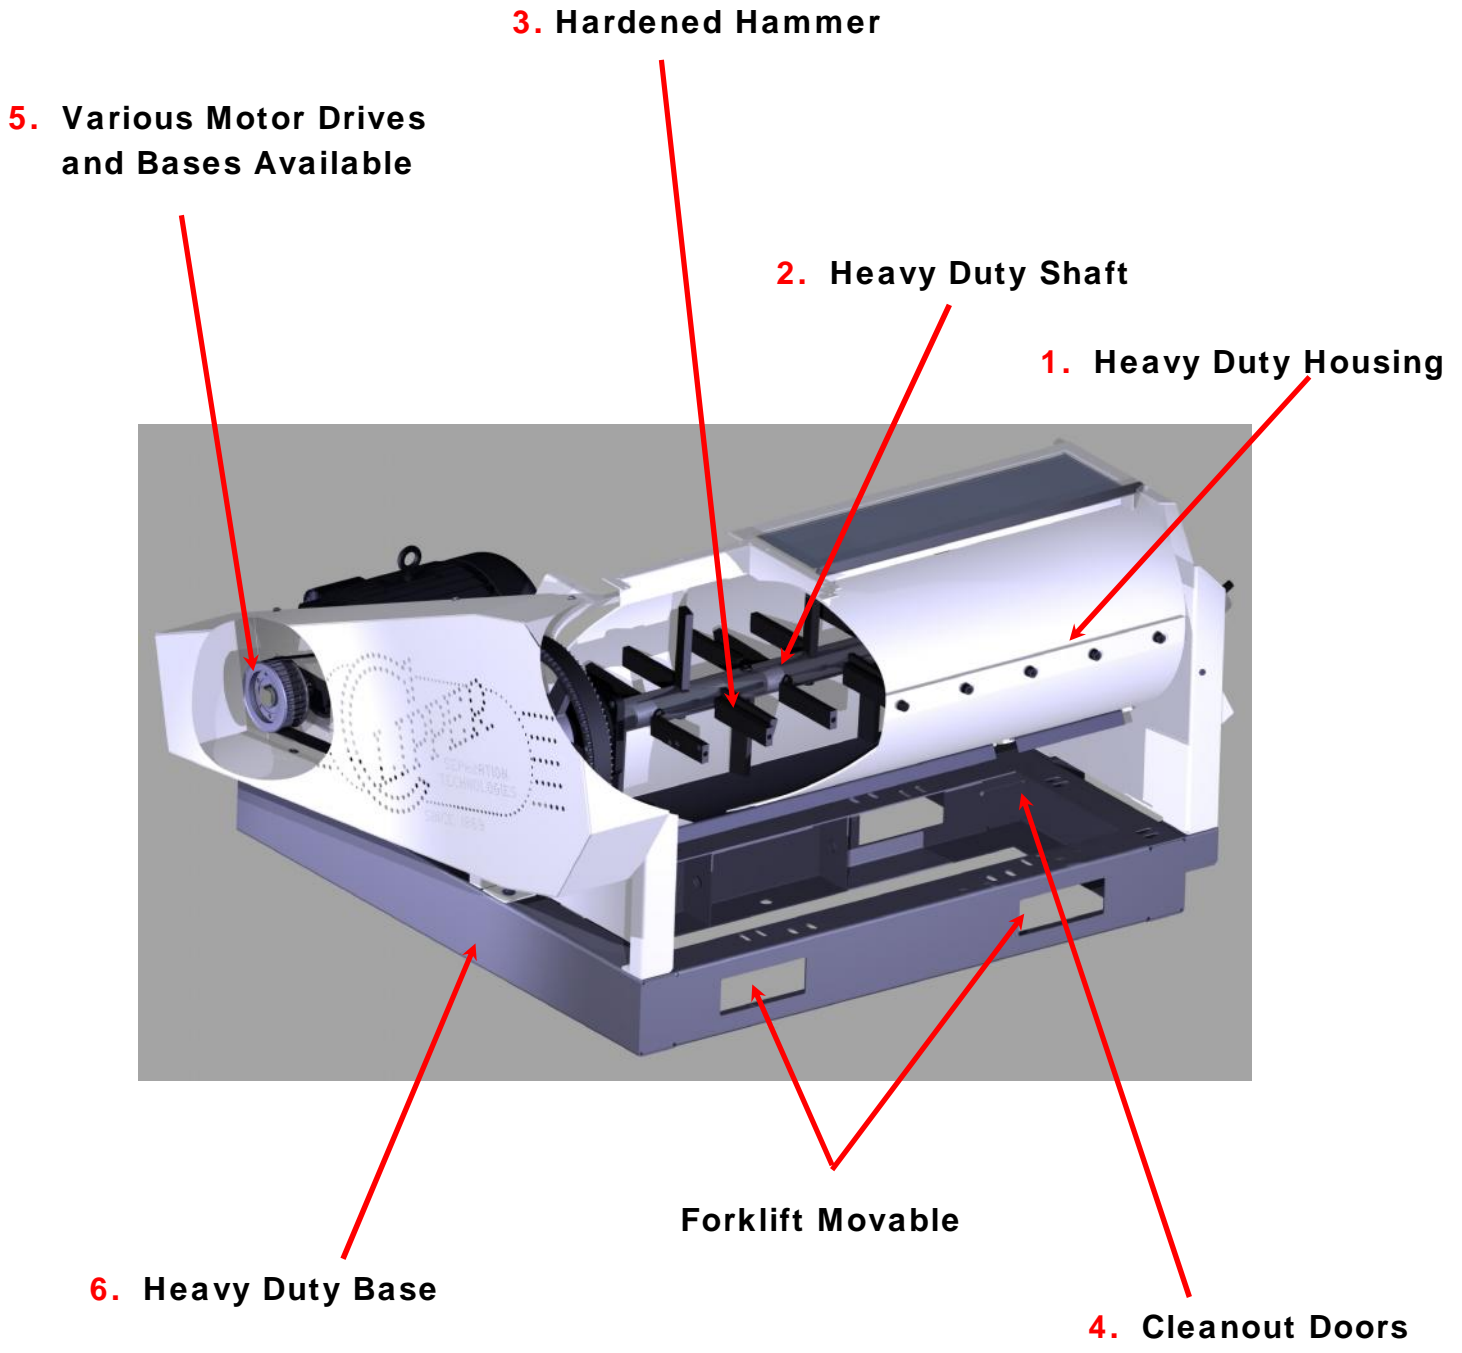

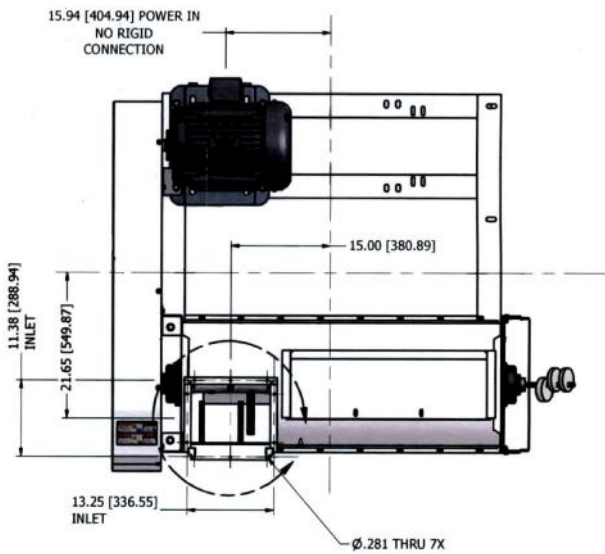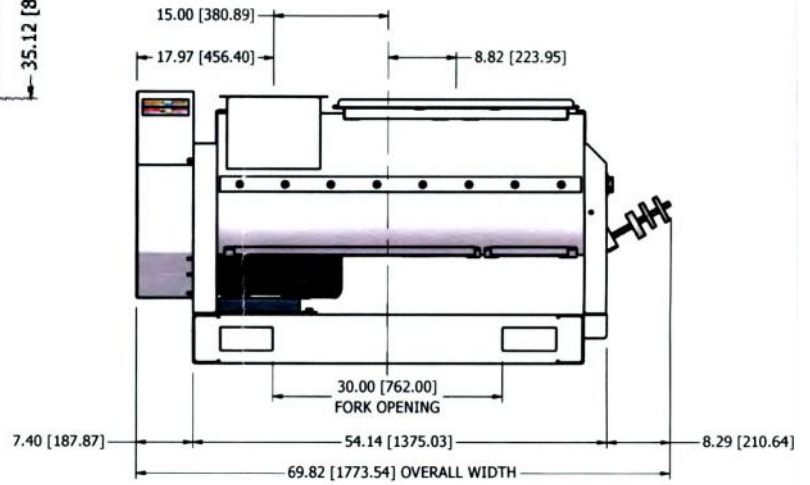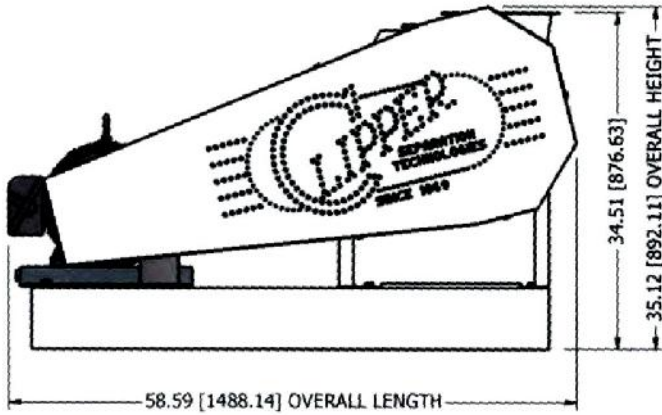

Allow a minimum of 60" from one side of machine for removal of hammer shaft. If no space is allowed hammer shaft may be extremely difficult to remove. Hammers must be removed from shaft before shaft removal.

