


Ferrell-Ross 24 X 56 Flake Master

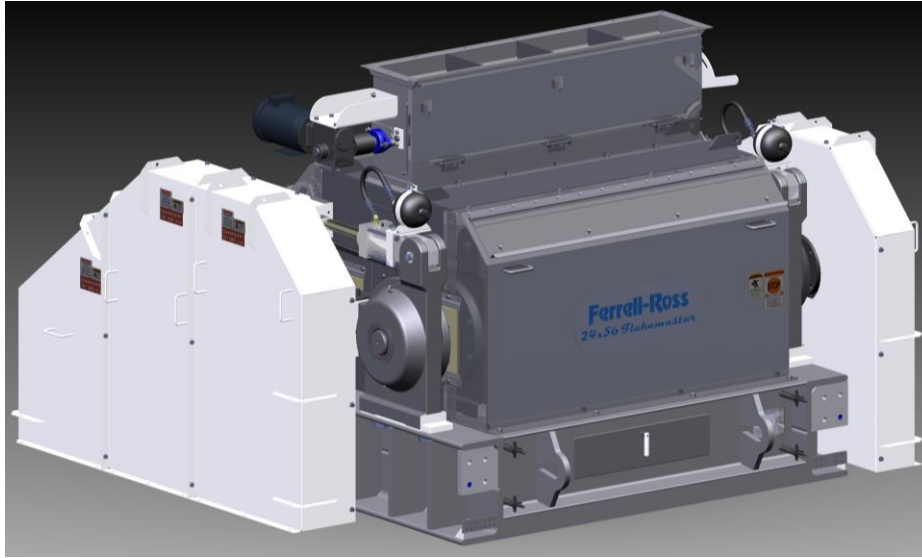

Whether being used to process oil seed or animal feed, the 24x56 Flake Master is built to perform the task. If flaking soybeans for oil seed production, the 24 x 56 will process 250 TPD. For flaking corn to a 26lb flake for animal feed, the Dual Drive 24 x 56 will process 20 TPH. This is accomplished with the synchronized HTD dual drive.

Optional Features:


- Epoxy Paint
- Vibratory Feeder
- Manual Control Panel
- Touch Screen Control Panel
- Pneumatic Scrapers

With a base constructed of 16" ship channel, the 24 x 56 is designed to last through years of operation. Standard saddles are available in aluminum, nylon or stainless steel. The 5-15/16" journals come standard with double row spherical bearings incased in custom Ferrell-Ross Cast Iron Bearing Housings.


Other Standard Features:

- Single or Dual Drive Packages
- Stainless Steel Roll Covers & Center Section
- Hydraulic Roll Tension with Accumulator Roll Protection
- Stainless Steel Pin Feeder with Slide Gate
- Variable Speed Feeder Control with Gearbox
- Convenient Roll Gap Adjustment
- Roll Preheat System
- Roll Removal from Front or Back
- Hydraulic Pump with Control




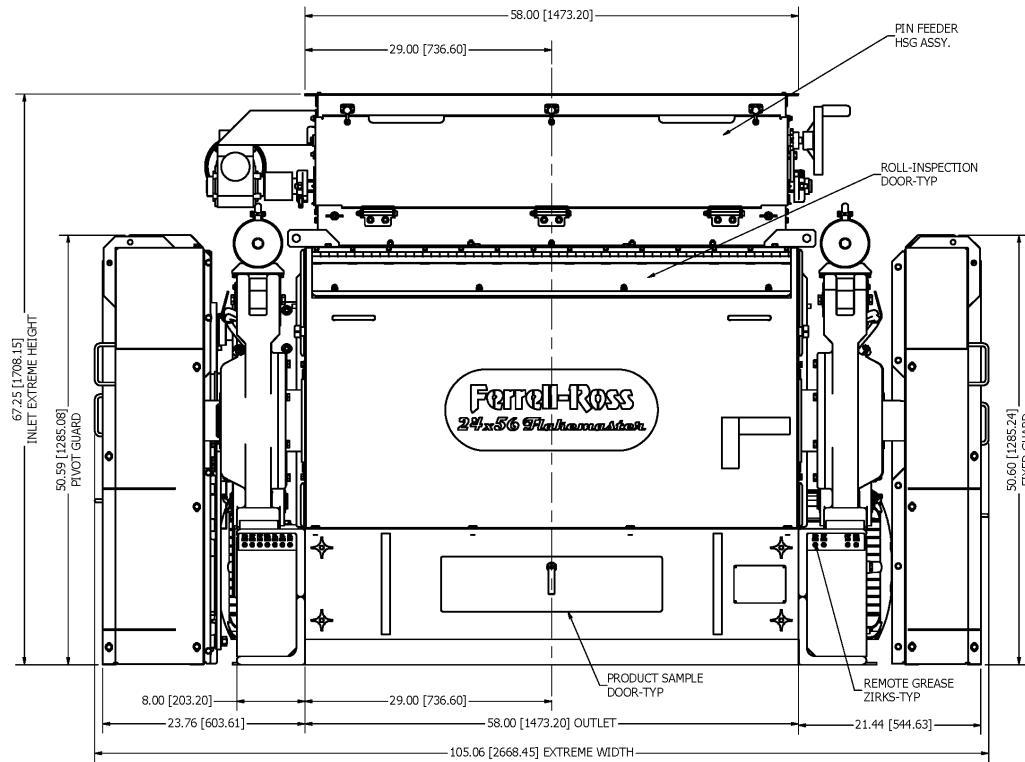

FRONT VIEW

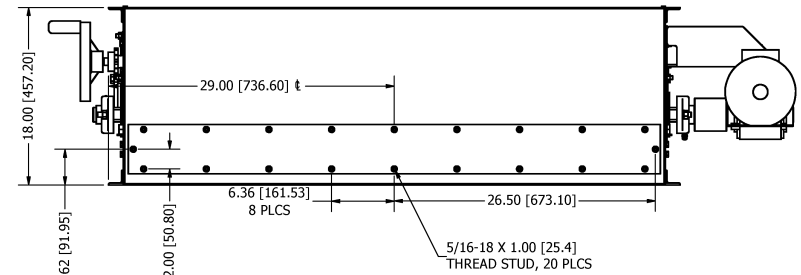

REAR VIEW-PIN FEEDER
STEAM VENT DETAIL

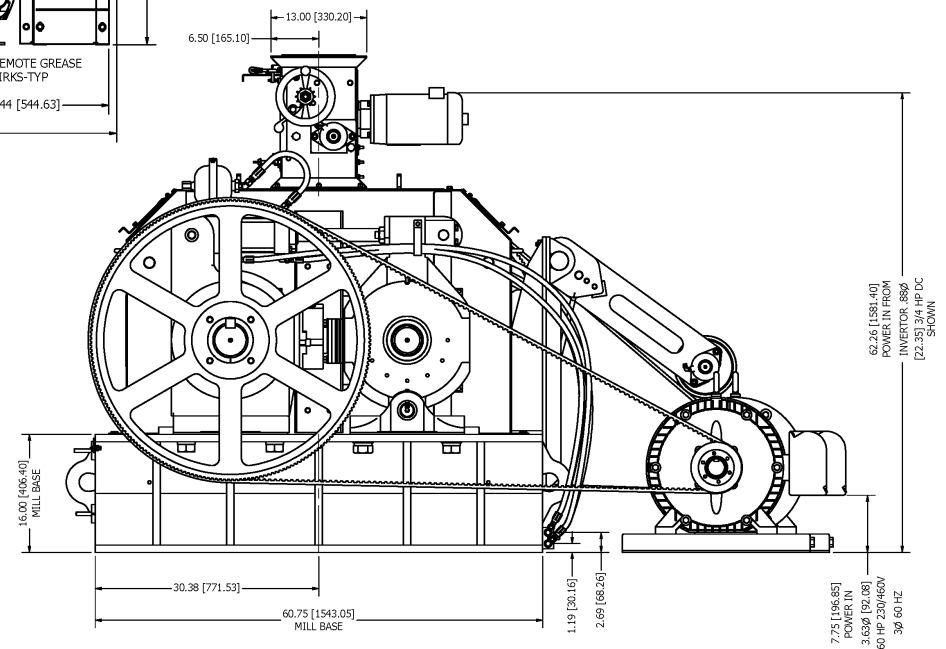

RIGHT SIDE VIEW
GUARDS REMOVED

DRAWING NOTES:

1. DO NOT SCALE FROM DRAWING
2. ALTERNATIVE UNITS (XX.XX) IN MILLIMETERS
3. SHIPPING WEIGHT: 23 000lbs/ 10,433 kg
4. RECOMMENDED MAINTENANCE CLEARANCE FROM BASE: 48.00" (1219) AT FRONT AND SIDES, 12.00" (305) AT REAR
5. FIXED AND PIVOT ROLL ASSEMBLIES MAY BE PULLED FROM THE FRONT OR REAR OF THE HOUSING.
6. HYDRAULIC CONNECTIONS # 6 (9/16-18) SAE 37 (J.I.C.) FLARE FITTING TUBE, MAXIMUM RECOMMENDED HYDRAULIC PRESSURE; 1800 PSI /126.55 KSC)
7. TWO #6 X 120" (3048) LONG HYDRAULIC HOSES INCLUDED WITH MILL TO CONNECT PUMP TO MILL
8. MILL BASE ASTM A36 8 X 1" ANGLE AND MC13 X 50 PAINTED FINISH, MILL HOUSING ASTM A240, A276 A312, T304SS, #3 POLISHED EXTERNAL FINISH